

B19a

SINGLE ROW SHROUDED HEADER SMT TYPE (WITH POLARIZATION)

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : Nylon 6T, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical






Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

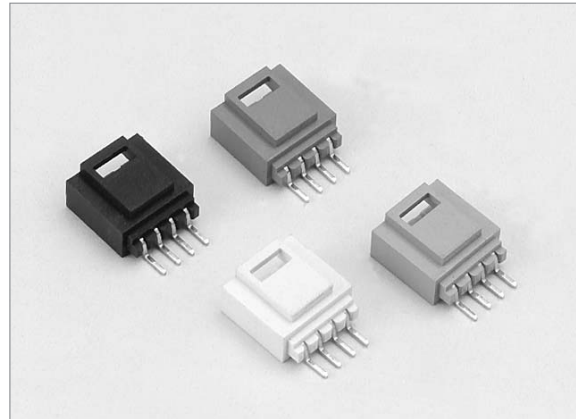

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

B19a - 1 - 2 - 3 - 4 - 5

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.MOUNTING TYPE	5.INSULATOR COLOR
04	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	M: SMT TYPE	1. BLACK