

C06f

BOX HEADER RIGHT ANGLE WITH UNDERCUT

PITCH: 2.0mm

SPECIFICATIONS

Material

Insulator : Nylon 6T, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical

Current Rating : 1 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C




◆ Mating Suggestion : A05c series.

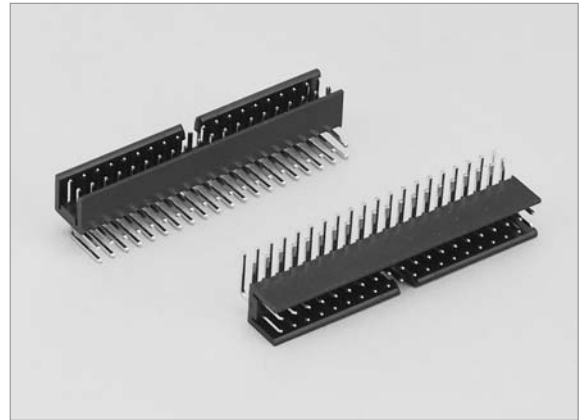

C

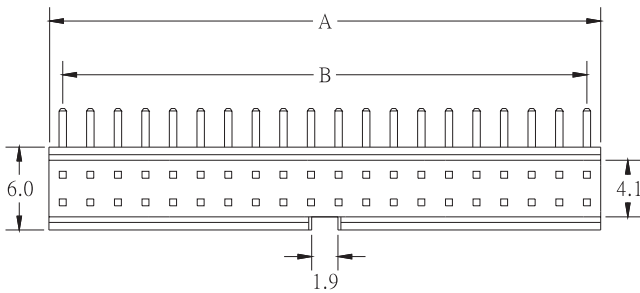

POSITION	A	B
6	6.0	4.0
8	8.0	6.0
10	10.0	8.0
12	12.0	10.0
14	14.0	12.0
16	16.0	14.0
20	20.0	18.0
22	22.0	20.0
24	24.0	22.0
26	26.0	24.0
30	30.0	28.0
34	34.0	32.0
40	40.0	38.0
44	44.0	42.0
50	50.0	48.0
68	68.0	66.0

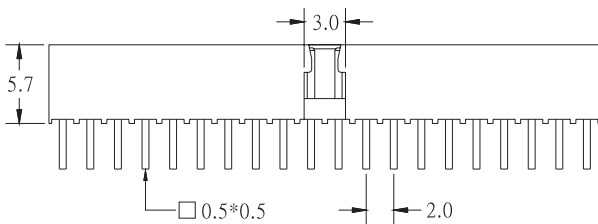

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER:

C06f - 1 - 2 - 3 - 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
06 08 10 12 14 16 20 22 24 26 30 34 40 44 50 68	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK